

Lutron Remote Drivers | Order Specification Guide

T3BAR LED® T3BAR UP® Sorella™

Lutron Item Number	Description
TBSL-L3DA4U1UKL-CV240	40W HI-LUME® 1.0% EcoSystem™ or 3-wire / 24Vdc Driver / Universal 100-277V
TBSL-L3D0-96W24V-U	96W HI-LUME® 0.1% EcoSystem™ or 3-wire / 24Vdc Driver / Universal 100-277V




WARRANTY: 5 years Optional EM Battery Kit available (sold separately).



LUTRON®
40W HI-LUME® Power Supply
 1.0% Ecosystem™ or 3-wire

Light modules can be parallel connected up to 4 linear feet per 40W Hi-Lume driver. Lutron's 40W HI-LUME® driver provides smooth, flicker free dimming from 100% to 1.0%. UL-Listed for remote use.

40W HI-LUME dimensions

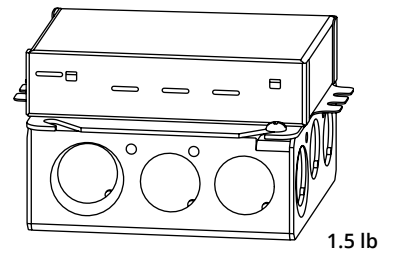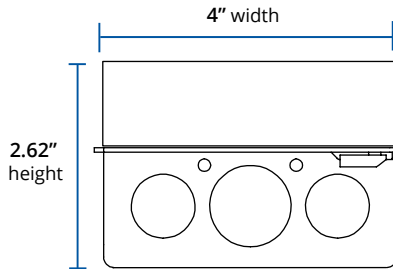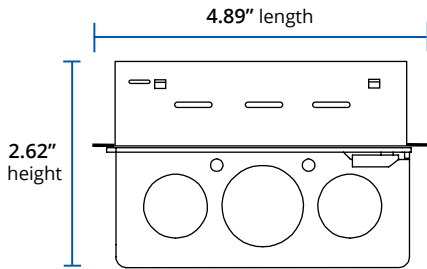




1.5 lb



LUTRON®
96W HI-LUME® Premier Power Supply
 0.1% Ecosystem™ or 3-wire

Light modules can be parallel connected up to 12 linear feet max per 96W Hi-Lume driver. Lutron's 96W HI-LUME® driver provides smooth, flicker free dimming from 100% to 0.1%. UL-Listed for remote use.

96W HI-LUME Premier dimensions

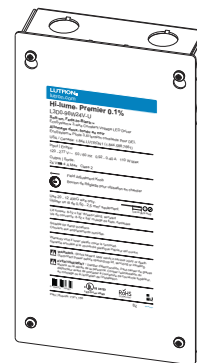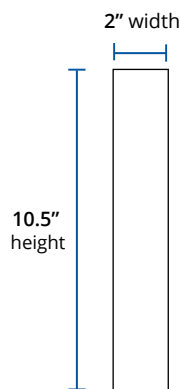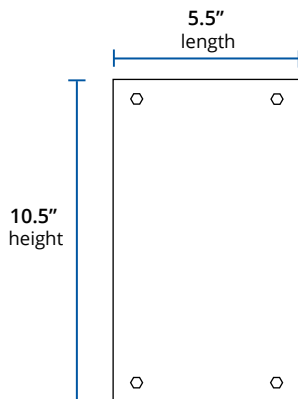

4 lb