

## T-BAR LED® and T-BAR UP® Controllers for tunable white models

T-BAR LED and T-BAR UP Tunable White models require a low voltage controller interface paired with the standard T-BAR LED remote driver in order to adjust the color temperature. The 2700K to 5000K tuning range can be manually selected, or automatically programmed to adjust based on the time of day. Using a DMX interface with the eldoLED option, or controlled via Bluetooth on a mobile device using the Casambi option. Dali control options also available, consult factory.



### eldoLED

Lineardrive 100W DMX control


A low voltage DMX controller that features separate cool white and warm white output channels to be controlled via DMX interface. When paired with a T-BAR LED power supply, it can control up to 6ft of tunable white product.



### Casambi

4ch PWM dimmer Bluetooth control

A low voltage Bluetooth controller with separate cool white and warm white outputs, controlled with the free Casambi app. When paired with a T-BAR LED power supply, it can control up to 6ft of tunable white product, and up to 127 Casambi units can form an intelligent mesh network.

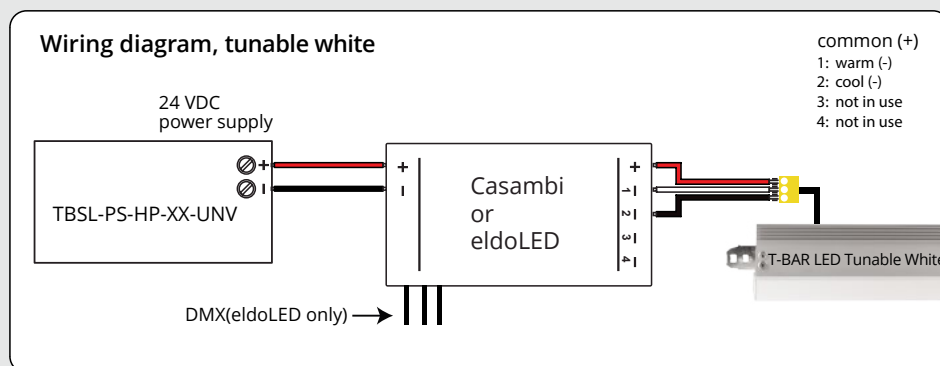


# T-BAR LED tunable white Remote Controllers | Order Specification Guide




Controller Item Number	Description
TBTUNE-LIN100D2	eldoLED LINEARdrive DC, 100W, DMX/RDM controllable, 4 control channels, constant voltage, 4x LED outputs
TBTUNE-CBU-PWM4	Casambi CBU-PWM4, Bluetooth controllable 4ch PWM dimmer

**WARRANTY:** 5 years

## eldoLED LINEARdrive 100D dimensions

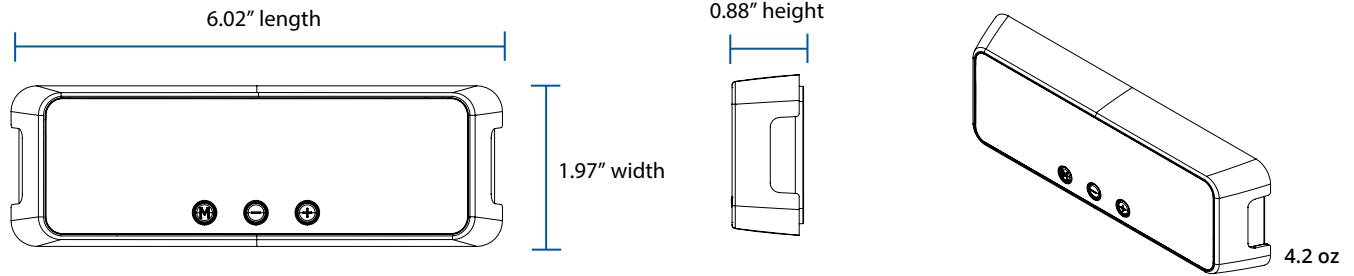

## Casambi CBU-PWM4 dimensions

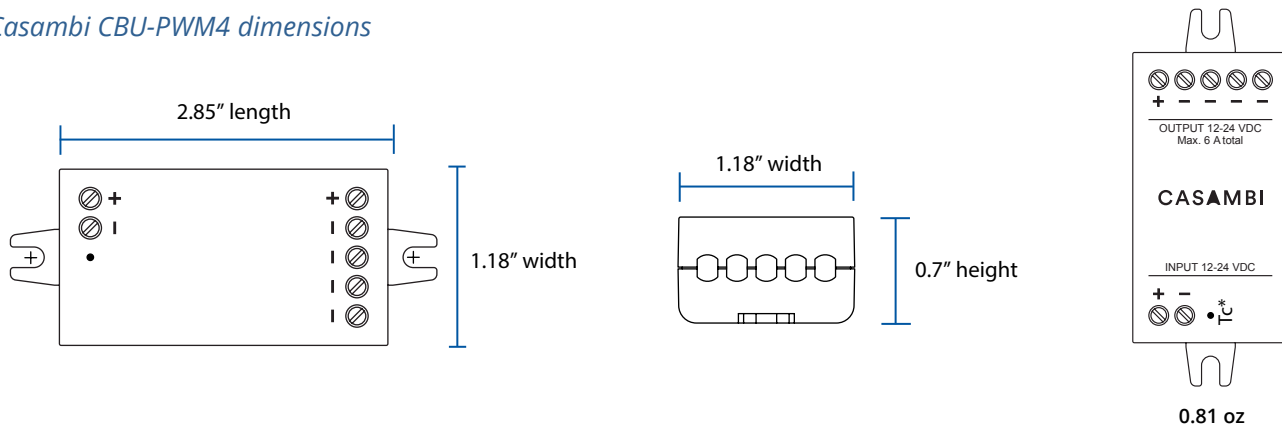

Noblis Headquarters – Reston, VA  
SmithGroup

