





ATTENTION: READ ALL INSTRUCTIONS ENTIRELY BEFORE INSTALLATION


THE ONLY LIGHTING PRODUCTS THAT ARE
ENGINEERED AND PATENTED TO REPLACE
THE CROSS MEMBERS IN A SUSPENDED
GRID CEILING SYSTEM



GEMINI™ 1"




GEMINI™ 2"

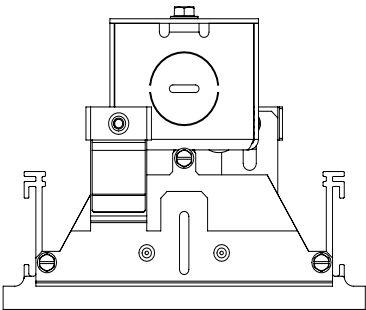

GEMINI™ 4"

SPECIFICALLY DESIGNED FOR
USE WITH 9/16" (T15/15B) GRID AND 15/16"
(T24) GRID



15/16"
Flat Grid



9/16"
Flat Grid



9/16"
Bullnose Grid





9/16"
Bolt Slot



CODE: T-BAR1163 GEMINI Universal Instruction Sheet 9/16" & 15/16" Rev.01

WHERE I CAN INSTALL THE GEMINI

- IN A NEW OR EXISTING 15/16" (T24) OR 9/16" (T15/15B) CEILING GRID INSTALLATION, VERIFY THE CEILING GRID IS IN A 2' x 2', 2' x 4', 4' x 4', OR OTHER COMPATIBLE GRID CEILING LAYOUT, LEAVING SPECIFIC OPENINGS FOR THE INSTALLATION OF THE GEMINI ACCORDING TO THE LIGHT REQUIREMENT.
- INSTALL THE APPROPRIATE LENGTH GEMINI AT THE CENTER OF THE SPACE, CREATING TWO EQUAL SECTIONS ON EITHER SIDE OF THE FIXTURE.

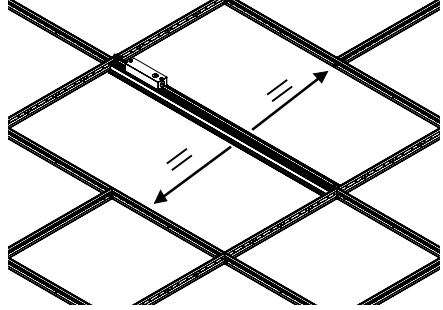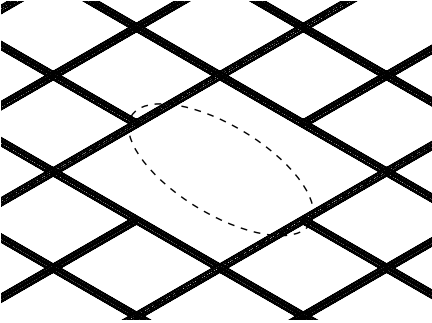


- PLACE THE PRODUCT OVER THE GRID FOLLOWING THE BELOW CONFIGURATION
- MAKE SURE THAT THE END CAP FLANGE OF THE GEMINI SITS FLAT ON THE CORRESPONDING GRID AS SHOWN IN DETAIL "A"

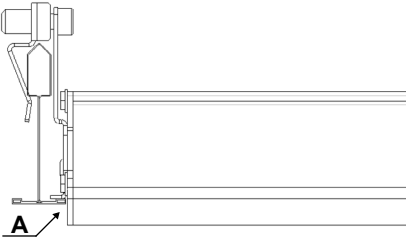


ONCE PRODUCT IS POSITIONED, TIGHTEN THE SCREW ON EACH END.

- GEMINI IS DESIGNED TO INSTALL END-TO-END WITH EITHER ANOTHER GEMINI FIXTURE (DETAIL "B") OR WITH A STANDARD CROSS TEE (DETAIL "C")

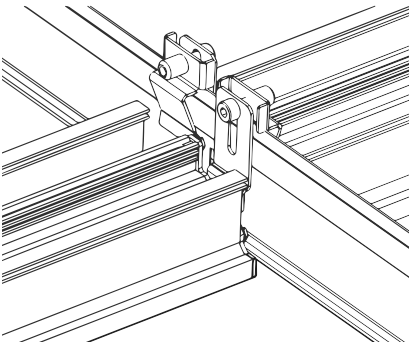


DETAIL B

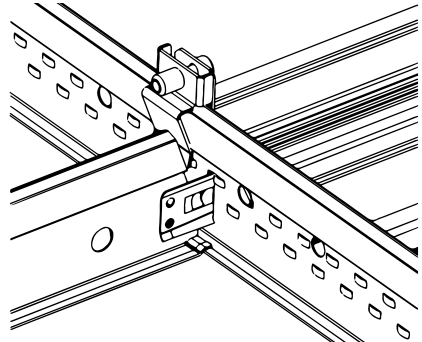


DETAIL C


TWIST CLIP INSTALLATION. TWIST THE CLIP INTO THE ACCESSORY CHANNEL ON THE FIXTURE, IN THE APPROXIMATE LOCATION OF EACH INTERSECTING GRID MEMBER. [DETAIL "A"] USE PROVIDED SET SCREWS TO SECURE THE TWIST CLIP TO THE FIXTURE USING A 3MM HEX KEY (BY OTHERS). [DETAIL "B"]



A



B




C

GRID ATTACHMENT. TRIM THE INTERSECTING GRID TO THE APPROPRIATE LENGTH, AND ATTACH THEM TO BOTH SIDES OF THE GEMINI FIXTURE. USE AN APPROPRIATE SELF-TAPPING SCREW (BY OTHERS) TO SCREW THE FIELD CUT GRID TO THE TWIST CLIPS [DETAIL "C"]

THE TWIST CLIP IS DESIGNED TO SUPPORT FLAT GRID RAISED 1/4" [DETAIL A] OR BOLT SLOT AND BULL NOSE GRID FLUSH WITH THE BOTTOM OF THE FIXTURE. [DETAIL B]


⚠ ENSURE FLAT GRID IS RESTING ON TOP OF GEMINI FLANGE. GRID SHOULD BE 1/4 ABOVE BOTTOM OF GEMINI



9/16" OR 15/16" FLAT GRID



DETAIL A

⚠ ENSURE DIMENSIONAL GRID IS NOT RESTING ON TOP OF GEMINI FLANGE. BOTTOM OF GRID SHOULD BE FLUSH WITH BOTTOM OF GEMINI



9/16" DIMENSIONAL GRID (BOLT SLOT OR BULL NOSE)


DETAIL B

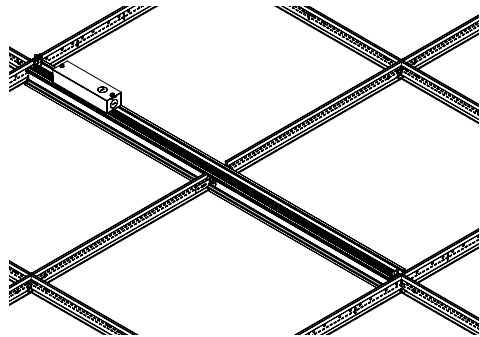


NOTE: GEMINI MUST BE ANCHORED TO THE ABOVE BUILDING STRUCTURE WITH STEEL CABLE (BY OTHERS) USING THE PROVIDED HOLES.

- AFTER THE GEMINI HAS BEEN WIRED (SEE FOLLOWING PAGE FOR INSTRUCTION), YOU CAN INSTALL THE APPROPRIATE SIZED CEILING TILES IN THEIR CORRECT POSITION OVER THE GEMINI PRODUCT. GEMINI IS DESIGNED TO HIDE FIELD CUT TILE EDGES

NOTE: GEMINI IS DESIGNED TO WORK WITH TEGULAR TILES (LIGHT SITS FLUSH WITH TILE) & LAY-IN TILES (LIGHT SITS PROUD OF TILE).

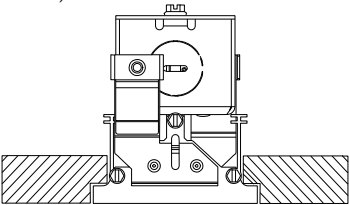


TEGULAR TILE INSTALLATION

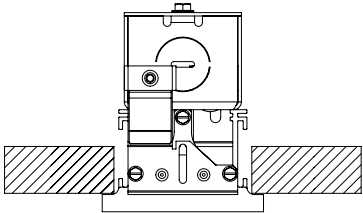

LAY-IN TILE INSTALLATION

ATTENTION: READ ALL INSTRUCTIONS ENTIRELY BEFORE INSTALLATION

HOW TO ELECTRIFY THE GEMINI

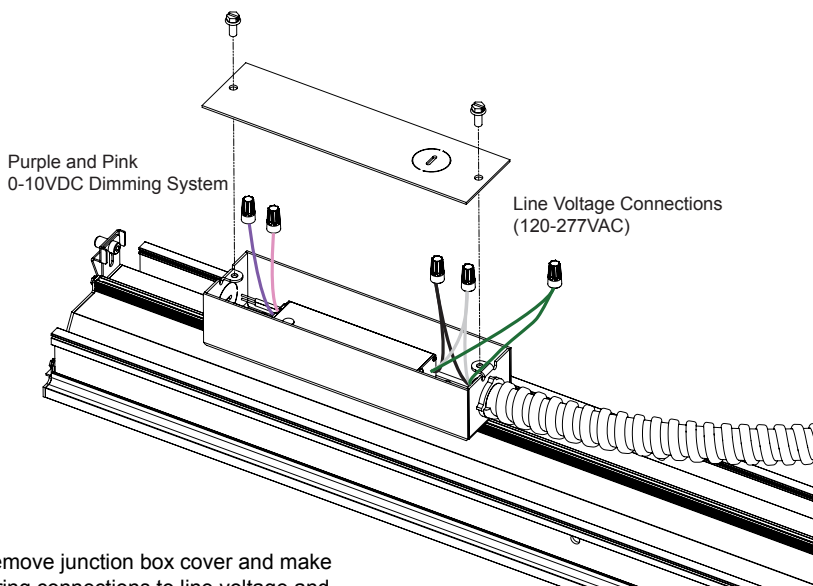

Remove junction box cover and make wiring connections to line voltage and dimming system (if needed). Replace cover when complete.

CAUTION:

- * This fixture must be installed and wired by a licensed electrician
- * JLC-Tech LLC will not be held responsible if the fixtures are not installed according to applicable codes and safety standards
- * Installation is subject to local code and jurisdiction
- * Keep these instructions for the person responsible for the maintenance of this installation

Electrical Ratings

Input Voltage: 120-277V, 50/60Hz

Refer to product label for model specific wattage ratings

ETL Listed for Indoor Use



MADE IN USA

For patent information see www.jlc-tech.com/patents



ATTENTION: READ ALL INSTRUCTIONS ENTIRELY BEFORE INSTALLATION

ATTENTION: READ ALL INSTRUCTIONS ENTIRELY BEFORE INSTALLATION