

# T-BAR TWO Remote Driver | Order Specification Guide



Product Name	Driver Type	Power	Wattage	Voltage
TBSL = T-BAR TWO Power Supply	PS = Non Dimmable DIM = 1% Dimmable 0-10 VDC	HP = High Power	200W = 192W	UNV = Universal 100-277V

**WARRANTY: 5 years** Optional EM Battery Kit available (sold separately).






## T-BAR TWO® Power Supply Option

### 24VDC LED Driver 192W Power Supply Kit 0-10 VDC dimmable and non dimmable


T-BAR TWO modules can be parallel connected up to either (8) 2ft fixtures or (4) 4ft fixtures max of each circuit per driver channel totaling 16 linear feet of illuminated product. Available with 0-10Vdc nominal 1% dimming.

- \* Power kit includes JB for AC input direct wiring with metal conduit and separate branch connections for control of each individual driver.

### 192W Power Supply dimensions

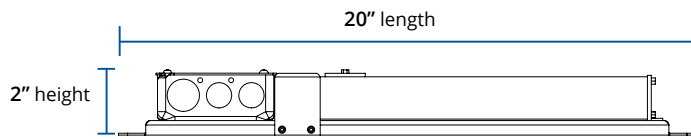

	Max Run Lengths			
	Circuit A Wattage	# Fixture/Driver A	Circuit B Wattage	# Fixture/Driver B
2ft fixture	10.8W	8	5.75W	8
4ft fixture	21.6W	4	11.3W	4

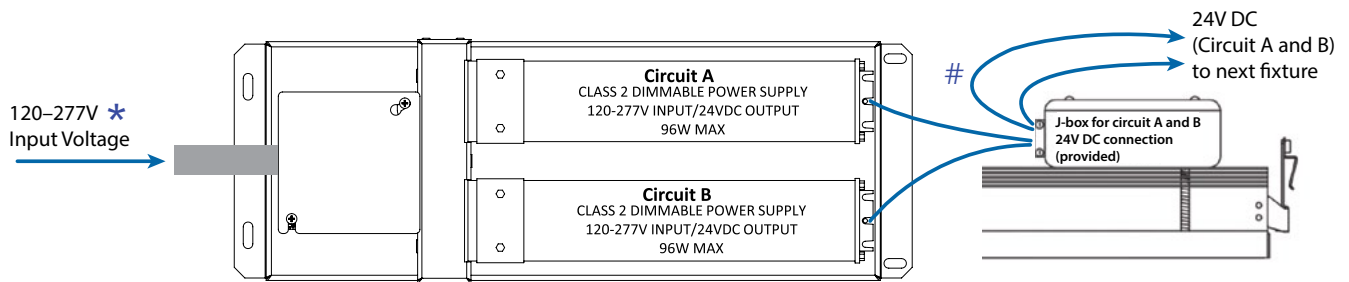

### # Wiring Chart:

Gauge	Length
18 (0.75 mm <sup>2</sup> )	30ft (9m) maximum
16 (1.5 mm <sup>2</sup> )	45ft (14m) maximum
14 (2.0 mm <sup>2</sup> )	70ft (21m) maximum

Extra cables for longer distances, by others