



CODE: T-BAR393 T-BAR LED TUNABLE WHITE INSTRUCTION SHEET 9/16" REV.02

**CLASS 2 Power Supply
(SOLD SEPERATELY)**
TBSL-PS-HP-XX-UNV
24Vdc Output Voltage

**HOW TO ELECTRIFY THE T-BAR LED
TUNABLE WHITE**

**CONTROLLER
(SOLD SEPERATELY)**
Casambi (TBTUNE-CBU-PWM4)
-or-
EldoLED (TBTUNE-LIN100D2)

PLENUM RATED 2' CABLE WITH CLASS II
QUICK CONNECTORS ON EACH SIDE FOR
MULTIPLE PRODUCT CONNECTIONS
(PROVIDED)

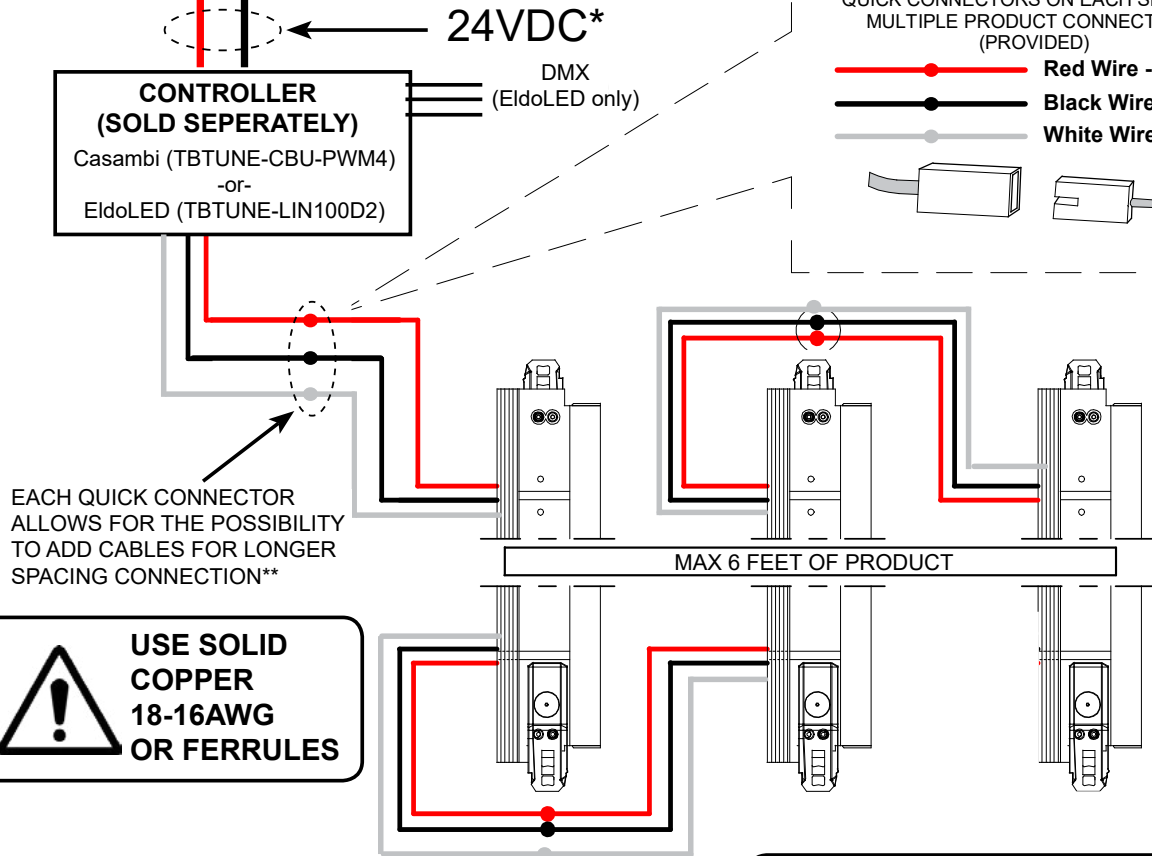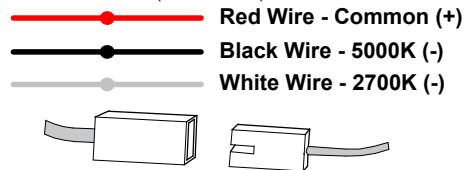

EACH QUICK CONNECTOR
ALLOWS FOR THE POSSIBILITY
TO ADD CABLES FOR LONGER
SPACING CONNECTION**

**USE SOLID
COPPER
18-16AWG
OR FERRULES**

*AWG 20-16 (NOT PROVIDED) MAX DISTANCE FROM
POWER SUPPLY TO CONTROLLER IS 30FT WITH
18AWG

**AWG 20-16 (NOT PROVIDED) MAX DISTANCE FROM
CONTROLLER TO FIXTURES IS 30FT USING 18AWG

**MAX 6FT OF T-BAR
LED TUNABLE WHITE
PRODUCT PER POWER
SUPPLY**

**REFER TO CONTROLLER MANUFACTURER FOR SPECIFIC
OPERATING INSTRUCTIONS**
Casambi CBU PWM4:
www.casambi.com/products/CBU-PWM4.html
EldoLED LinearDrive100:
www.eldoled.com/led-drivers/lineardrive/4-24-amps-constant-voltage-led-drivers/dc-100d/

ATTENTION! READ ALL INSTRUCTIONS ENTIRELY BEFORE INSTALLATION!



ETL Listed for Indoor Use

For patent information see
www.jlc-tech.com/patents

MADE IN USA