


HOW TO ELECTRIFY AND CONTROL THE T-BAR RGBW

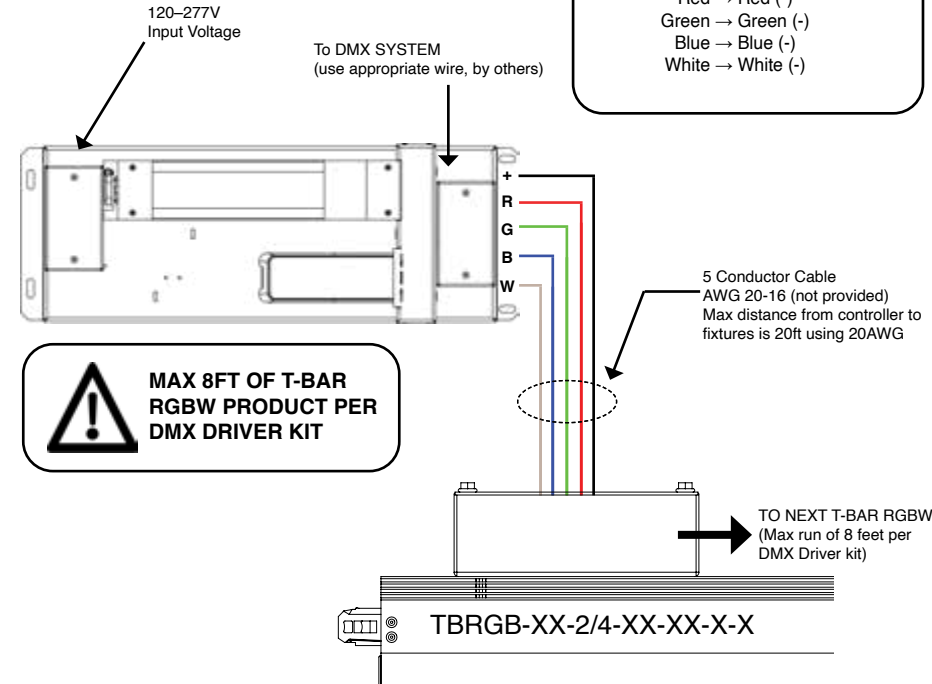

ATTENTION: READ ALL INSTRUCTIONS ENTIRELY BEFORE INSTALLATION

CAUTION:

*This fixture must be installed and wired by a licensed electrician.

*JLC-Tech LLC will not be held responsible if the fixtures are not installed according to applicable codes and safety standards

*Installation is subject to local code and jurisdiction

*Keep these instructions for the person responsible for the maintenance of this installation.

REFER TO DMX DRIVER INSTALLATION GUIDE FOR SPECIFIC OPERATING INSTRUCTIONS:



RoHS

4005225

MADE IN USA

For patent information see www.jlc-tech.com/patents

ATTENTION: READ ALL INSTRUCTIONS ENTIRELY BEFORE INSTALLATION
 SPECIFICALLY DESIGNED FOR 15/16" (T24) GRID & 9/16" (T15H)

FOR MODELS:



- BLOCK LENS
- ASYMMETRIC
- SIGNAGE

THE ONLY LIGHTING PRODUCTS THAT ARE ENGINEERED AND PATENTED TO REPLACE THE CROSS MEMBERS IN A SUSPENDED GRID CEILING SYSTEM

TBRGB-XX-X-24-X-U-X
 SPECIFICALLY DESIGNED FOR USE WITH 15/16" (T24) GRID

TBRGB-XX-X-15H/15HB-X-U-X
 SPECIFICALLY DESIGNED FOR USE WITH 9/16" (T15) GRID

15/16" (T24)

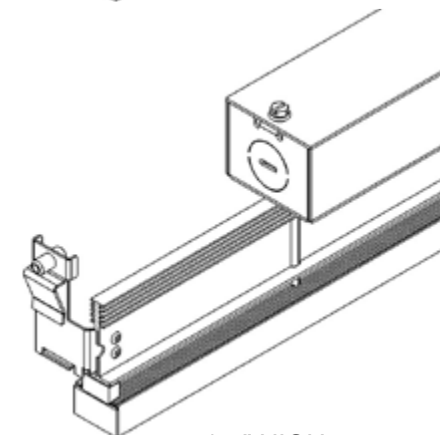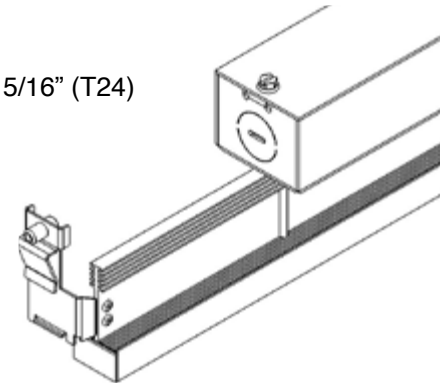


9/16" HIGH EFFICIENCY (T15H)

CODE: T-BAR317 T-BAR RGBW Universal Instruction Sheet 9/16" & 15/16" Rev.04


WHERE I CAN INSTALL THE T-BAR RGBW™

- IN A NEW CEILING INSTALLATION 15/16" (T24) OR 9/16" (T15H) GRID, ORGANIZE THE PLOT TO HAVE A 2'x4' (60x120cm), OR 4'x4' (120x120cm) SPACES WHERE THE 2' OR 4' T-BAR RGBW™ WILL BE INSTALLED (ACCORDING TO THE LIGHT REQUIREMENT)
- INSTALL THE T-BAR RGBW™ AT THE CENTER OF THE SPACE, CREATING TWO SECTIONS OF 2'x2' (60x60cm) OR 2'x4' (60x120cm) EACH, DEPENDING IF USING A 2' OR 4' T-BAR RGBW™

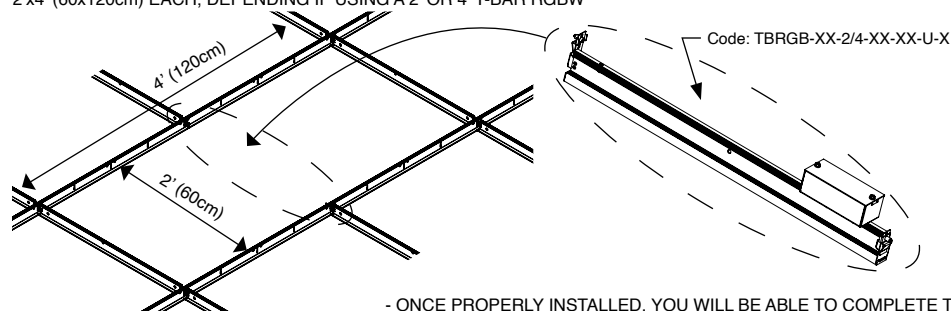


- ONCE PROPERLY INSTALLED, YOU WILL BE ABLE TO COMPLETE THE CEILING WITH 2'x2' (60x60cm) OR 2'x4' (60x120cm) TILES

- IN AN EXISTING SUSPENDED CEILING 15/16" (T24) OR 9/16" (T15H), LOCATE THE 2' (60cm) OR 4' (120cm) CROSS TEES THAT ARE INTENDED TO BE SUBSTITUTED WITH THE 2' (60cm) OR 4' (120cm) T-BAR RGBW™ (ACCORDING TO THE LIGHT REQUIREMENT)
- TEMPORARILY REMOVE THE TILES WITHIN THE SPACE YOU SELECTED
- REMOVE THE 2' (60cm) OR 4' (120cm) CROSS TEE AND REPLACE IT WITH THE 2' (60cm) OR 4' (120cm) T-BAR RGBW™
- ONCE PROPERLY INSTALLED, PLACE THE 2'x2' (60x60cm) OR 2'x4' (60x120cm) TILES BACK-

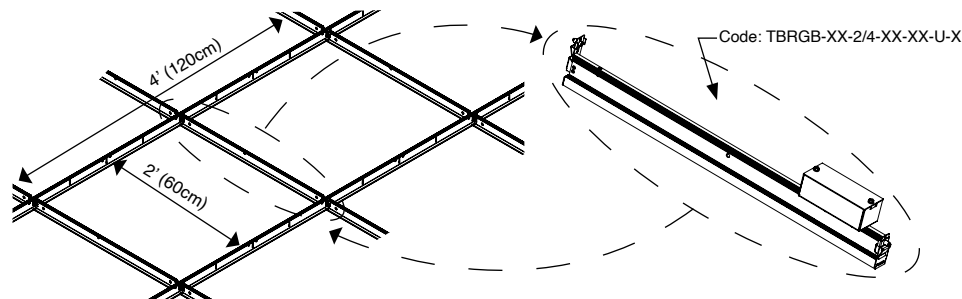


NOTE: MAKE SURE THAT THE T-BAR RGBW™ IS POSITIONED TO ALLOW THE CORRECT PLACING OF THE CORRESPONDENT TILES


T-BAR RGBW™ MUST BE ANCHORED TO THE ABOVE BUILDING STRUCTURE WITH A STEEL CABLE USING THE CENTER HOLE. (STEEL CABLE BY OTHERS)

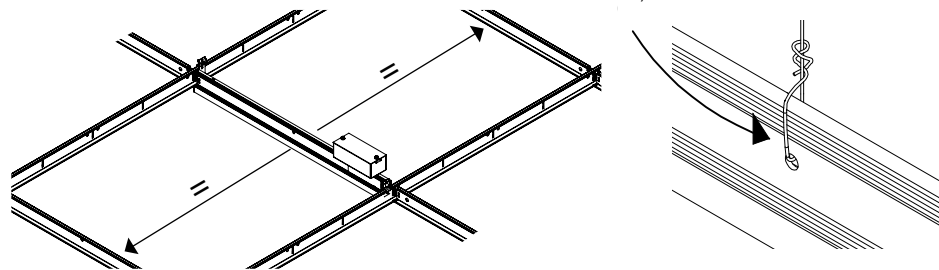**HOW I INSTALL THE T-BAR RGBW™**


- PLACE THE PRODUCT OVER THE GRID FOLLOWING THE BELOW CONFIGURATION.
- MAKE SURE THAT THE UPPER PLANE OF THE T-BAR RGBW™ IS AT THE SAME PLANE WITH THE UPPER PLANE OF THE GRID AS SHOWN IN DETAIL "A".

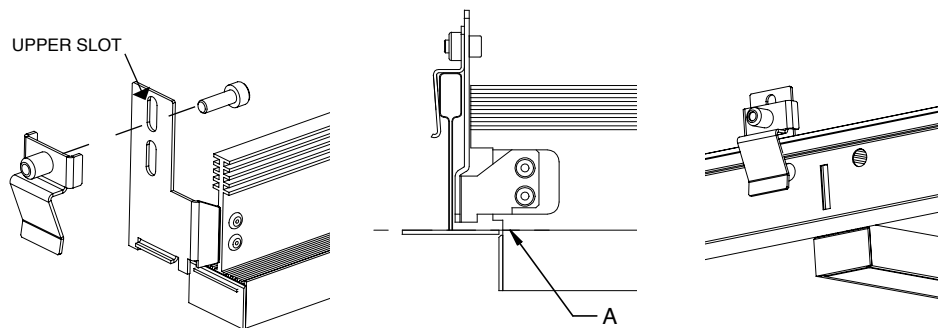


NOTE: THE SLOTS ON THE MOUNTING BRACKET ARE DESIGNED TO ACCOMODATE DIFFERENT GRID HEIGHTS




ONCE THE PRODUCT IS POSITIONED, TIGHTEN THE SCREW ON EACH END

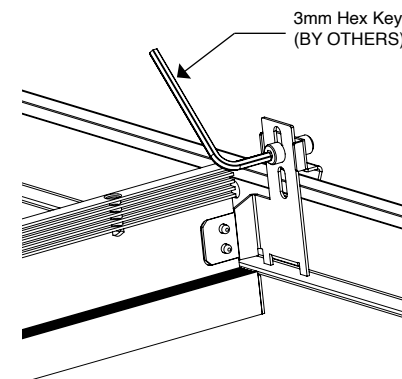

- AFTER YOU HAVE ELECTRIFIED THE SYSTEM (SEE FOLLOWING PAGE FOR INSTRUCTION), YOU CAN INSTALL THE TILES IN THEIR CORRECT POSITION OVER THE T-BAR RGBW™ PRODUCT



15/16" (T24)



9/16" HIGH EFFICIENCY (T15H)

ATTENTION: READ ALL INSTRUCTIONS ENTIRELY BEFORE INSTALLATION