

ETL listed for indoor use

CAUTION:


* T-BAR QUADRO™ is designed to work with Class 2 - 24Vdc power supply only (included with kit). Use of any other power source will cause damage, shorten the life of the fixture and may void the warranty

*This fixture must be installed and wired by a qualified electrician.

*JLC-Tech LLC will not be held responsible if the fixtures are not installed according to applicable codes and safety standards.

*Installation is subject to local code and jurisdiction.

*Keep these instructions for the person responsible for the maintenance of this installation.

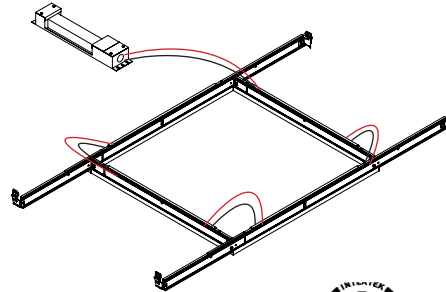

RoHS




MADE IN USA

HOW TO ELECTRIFY THE T-BAR QUADRO™

CLASS 2 POWER SUPPLY 120-277V/24Vdc
INCLUDED WITH KIT
REFER TO DRIVER INSTALLATION FOR
SPECIFIC WIRING INSTRUCTIONS

PLENUM RATED 2' CABLE WITH CLASS II
QUICK CONNECTORS TO CONNECT KIT
TOGETHER


RED CABLE
BLACK CABLE



120-277V AC INPUT
24Vdc Output Voltage

EACH QUICK CONNECTORS
ALLOWS FOR THE POSSIBILITY
TO ADD CABLES FOR LONGER
SPACING CONNECTION.

ONLY ONE T-BAR QUADRO KIT CONNECTED PER POWER SUPPLY

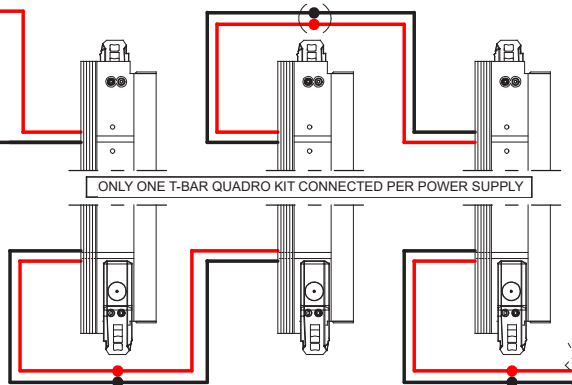


ATTENTION! READ ALL INSTRUCTIONS ENTIRELY BEFORE INSTALLATION

ATTENTION: READ ALL INSTRUCTIONS ENTIRELY BEFORE INSTALLATION

THE ONLY LIGHTING PRODUCTS
THAT ARE ENGINEERED AND
PATENTED TO REPLACE THE CROSS
MEMBERS IN A SUSPENDED GRID
CEILING SYSTEM.

FOR MODELS:

- DIFFUSING LENS
- BLOCK LENS
- CUT-OFF REFLECTOR

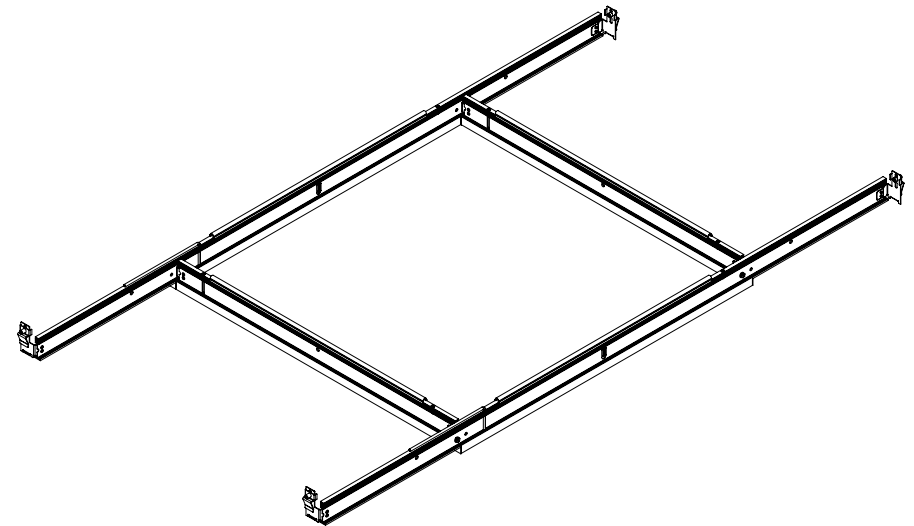


**SPECIFICALLY
DESIGNED FOR 9/16" (T15) GRID**

For patent information see: www.jlc-tech.com/patents




CODE: T-BAR494 T-BAR Quadro Instruction Sheet 9/16" Universal Rev .02

WHERE I CAN INSTALL THE T-BAR QUADRO™



- IN A **NEW** CEILING INSTALLATION 9/16" (T15) GRID, LEAVE THE AREA OPEN THAT WOULD TYPICALLY HAVE TWO ADJACENT 4' (120cm) CROSS TEES SPANNING BETWEEN MAIN RUNNERS. THIS IS WHERE THE T-BAR QUADRO WILL BE INSTALLED (ACCORDING TO THE LIGHT REQUIREMENT)
- IN AN **EXISTING** CEILING INSTALLATION 9/16" (T15) GRID, LOCATE THE ADJACENT 4FT CROSS TEES SPANNING BETWEEN MAIN RUNNERS THAT ARE INTENDED TO BE SUBSTITUTED WITH THE T-BAR QUADRO. TEMPORARILY REMOVE THE TILES IN THIS AREA, THEN REMOVE THE 4FT CROSS TEES THAT ARE TO BE REPLACED.

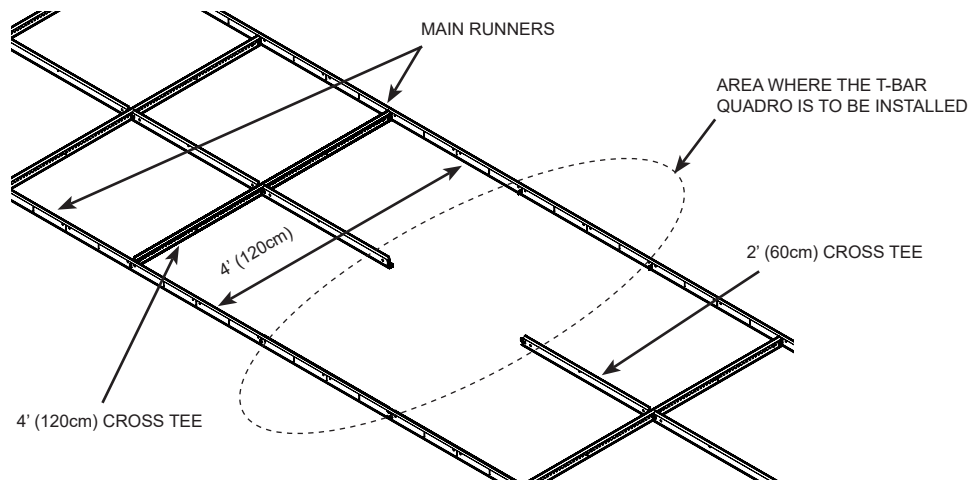**HOW I INSTALL THE T-BAR QUADRO™**


- INSTALL BOTH 4FT (120cm) MODULE **A** T-BAR QUADRO LIGHTS IN THE LOCATION NORMALLY OCCUPIED BY THE 4FT (120cm) CROSS TEES, BY PLACING THE CLIPS OVER THE MAIN RUNNER AS SHOWN IN **DETAIL A**.
- MAKE SURE THE UPPER PLANE OF THE T-BAR QUADRO LIGHT IS AT THE SAME LEVEL OF THE UPPER PLANE OF THE GRID, AS SHOWN IN **DETAIL B**.
- ONCE BOTH PRODUCTS ARE IN POSITION, TIGHTEN THE SCREW ON EACH END USING A 3mm HEX KEY (BY OTHERS).

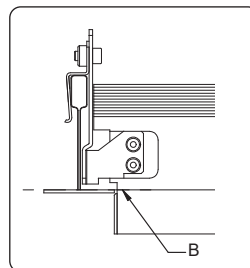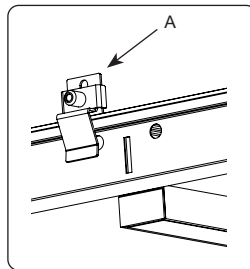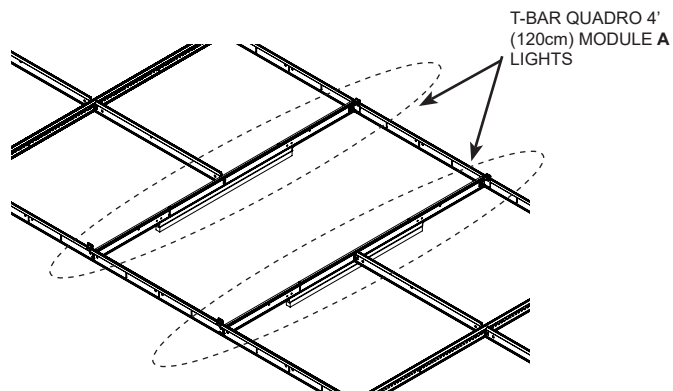


- CAREFULLY POSITION ONE OF THE 2' (60cm) MODULE **B** T-BAR QUADRO LIGHTS INTO POSITION BETWEEN THE 4' (120cm) MODULE **A** LIGHTS, AS SHOWN BELOW.
- LINE UP THE BRACKET ON THE 2' LIGHT, WITH THE APPROPRIATE HOLE ON THE 4' (120cm) LIGHT (**DETAIL C**), TO **ENSURE THE LIGHT COMPARTMENTS MEET AT THE PROPER RIGHT ANGLE, AS SHOWN IN **DETAIL D****.
- USING THE PROVIDED SHEET METAL SCREW, FASTEN THE BRACKET TO THE 4' (120cm) LIGHT AS SHOWN IN **DETAIL E**.
- REPEAT FOR THE OTHER 2' (60cm) LIGHT TO COMPLETE THE SQUARE, VERIFY THE CENTER OPENING IS 24" AND THE SIDES ARE EQUAL TO ALLOW CORRECT PLACING OF THE CORRESPONDENT TILES.

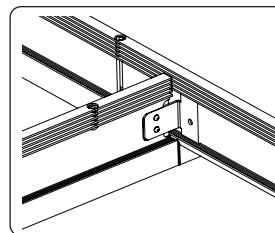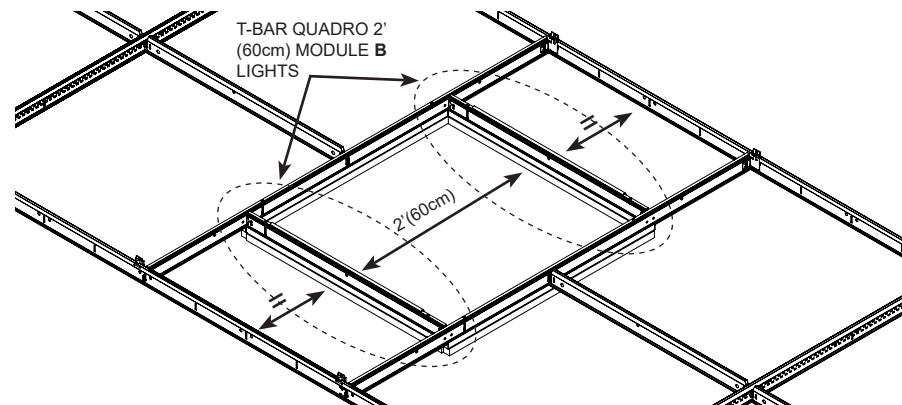

DETAIL C
ALIGNING BRACKET WITH HOLE

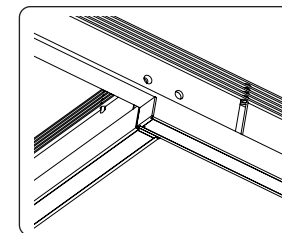


DETAIL D
VERIFY LIGHT COMPARTMENTS
MEET AT RIGHT ANGLE

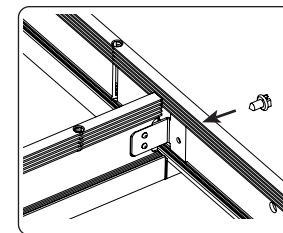


DETAIL E
FASTEN PARTS USING PROVIDED
SCREW IN DIRECTION SHOWN

T-BAR QUADRO MUST BE ANCHORED TO THE ABOVE BUILDING STRUCTURE WITH A STEEL CABLE USING THE CENTER HOLES. (STEEL CABLE BY OTHERS)

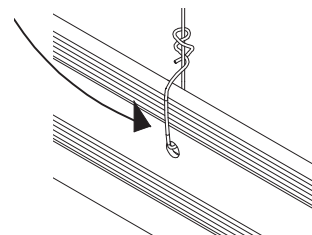

- AFTER YOU HAVE ELECTRIFIED THE SYSTEM (SEE FOLLOWING PAGE FOR INSTRUCTION), YOU CAN INSTALL THE TILES IN THEIR CORRECT POSITION OVER THE T-BAR QUADRO PRODUCT

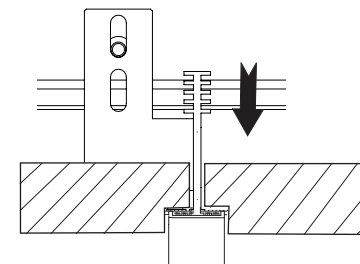

ATTENTION! READ ALL INSTRUCTIONS ENTIRELY BEFORE INSTALLATION